


- *Low Cost.....\$295.00*
- *Super Rugged...100% Solid State*
- *Self-Amplifying...High Level Output*
- *Wide Range of Input Power...+8 to 30 Volts*

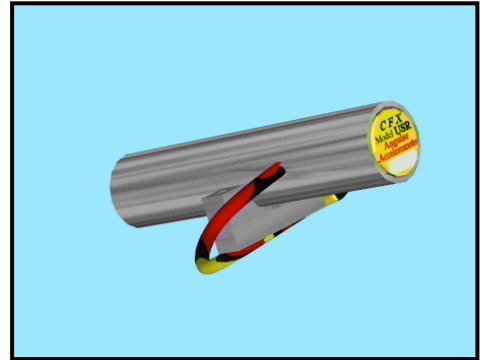

MODEL USCR LOW COST ANGULAR ACCELEROMETER

Specifications

Electrical	
Ranges Available	+/- 500 to +/- 5000 rad per sec sqd.
Power Required	+ 8 to +30 vdc, 5 ma maximum
Output Voltage	0.5 to 4.5 VDC
Zero Output Voltage *	2.500 +/- 0.05 VDC
Linear Acceleration Sensitivity	Less than 5 rad / sec sqd/ g
Output Noise	Typically Less Than 1 % F.S.
Frequency Response (Typical)	DC to 100 Hz +/- 5% (-6dB / Octave Above 200 Hz)

Environmental	
Operating Temperature	-10 to 75 Deg C
Vibration Survival	20 G RMS, 2 to 2000Hz
Shock Survival	1000G, 1ms 100G, 11ms
Humidity	95% R.H.

CFX P.O. Box737, Westtown,Pa Phone 610-692-6357